


PRODUCT DATA

BIO-NOX

Biodegradable water-based maximum performance concrete form release agent.

VOLATILE ORGANIC COMPOUND
(VOC) REGULATORY COMPLIANCE

BIO-NOX

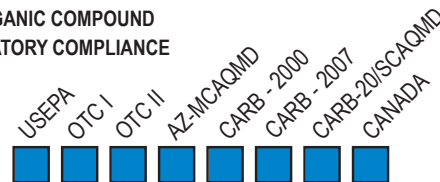

HOW IT WORKS

BIO-NOX chemically reacts with concrete to produce a slippery soap-like film that positively prevents bonding of concrete to form surfaces.

APPLICATIONS

- ◆ Use on most smooth, clean form surfaces such as steel, HDO, MDO, plastic, and fiberglass, as well as on bare plywood and plywood-faced handset forms.
- ◆ Use on many rubber and closed cell foam forms and form liners that cannot tolerate conventional solvent or petroleum-based release agents.
- ◆ Ideal for use where environmental and occupational issues are of the utmost importance, such as enclosed precast operations or enclosed building sites.

ADVANTAGES

- ◆ 100% biodegradable formulation.
- ◆ Free from conventional form oil, diesel oil, or kerosene.
- ◆ Ideal for producing architectural concrete—no staining and minimal surface voids or bugholes.
- ◆ Crisp, positive release.
- ◆ Reduces form cleaning and maintenance costs. Forms become self-cleaning with continued use.
- ◆ Contains a corrosion inhibitor designed to prevent flash rusting.
- ◆ Reduces likelihood of skin or odor irritations that can occur with petroleum-based release agents.
- ◆ Concrete surfaces are free of residue and the natural bonding characteristics of paints, plasters, mortars, epoxies, and other surface coatings are not affected when BIO-NOX is properly applied.
- ◆ Can be used in most situations where forms are stripped and repoured within 24 hours.
- ◆ Can be successfully applied to damp form surfaces.
- ◆ Less sensitive to application rate variations than other chemically active form release agents.
- ◆ Fast-drying formulation allows early bed traffic and stringing of reinforcing strands.
- ◆ Green Engineered® — better for health and the environment.

- ◆ Meets all federal and state VOC requirements. Also meets all known Occupational Safety and Health (OSHA) regulations and Environmental Protection Agency (EPA) requirements for biodegradability.

⚠ PRECAUTIONS ⚠

- ◆ Water-based chemically active form release agents are not visible on applied surfaces once dry. This is normal and does not affect release agent performance. After form stripping, a white, powdery film will be present on form surfaces. This causes no adverse effects on the form or the concrete and should not be confused with buildup.
- ◆ Do not use on concrete or plaster molds unless they are adequately sealed with a suitable chemically resistant sealer or coating prior to application.
- ◆ Requires reapplication if concrete has not been placed within 21 days following the initial application.
- ◆ Protect from freezing. If allowed to freeze, product packaging may rupture and the emulsion stability of this product may be affected, making it difficult to keep product mixed during application. Product that is suspected of freezing should not be used.
- ◆ Verify that product is within the “USE BY” date stated on product packaging. Do not use expired product. The use of expired product may result in poor product performance or failure.
- ◆ Do not apply if temperature is at or below 32° F (0° C). However, freezing temperatures do not affect product performance after applied product has dried.

USE INSTRUCTIONS

- ◆ Request current product literature, labels, and safety data sheets from manufacturer and read thoroughly before product use.
- ◆ Site environmental conditions, substrate conditions, and construction have a major effect on product selection, application methods, procedures and rates, appearance, and performance. Product literature provides general information applicable to some conditions. However, an adequate site test application by the purchaser or installer in advance of field scale use is mandatory (irrespective of any other verbal or written representations) to verify that product and quantities purchased can be satisfactorily applied and will achieve desired appearance and performance under intended use conditions.

Form Release Agents

nox-crete®

chemical solutions to concrete problems

www.nox-crete.com



- ◆ Apply at air and substrate (form) temperatures above 32° F (0° C).
- ◆ Application rates necessary to optimize performance vary with the form surface condition, porosity, concrete buildup (if any), concrete composition, concrete curing time and temperatures.
- ◆ Typical application rate on clean, smooth steel or dense plastic forms is 2,000 - 2,500 sf / gal. (50 - 60 sm / L). Typical application rate on raw (not overlaid or resin-coated) plywood is 800 - 1,000 sf / gal (20 - 25 sm / L).
- ◆ Mix well before use with Nox-Crete's DRUM AGITATOR or other suitable mixing apparatus before use. Always remix prior to each withdrawal from container and immediately prior to each use.
- ◆ Can be applied using all conventional methods; however, for best results, use a low-pressure sprayer such as Nox-Crete's PERFECT SPRAYER equipped with the 8001 LP tip (included with the Nox-Crete PERFECT SPRAYER).
- ◆ Apply to clean, reasonably dry forms. Use care to prevent contact with reinforcing steel.
- ◆ Avoid puddles, runs, and excessive spray drift.
- ◆ Promptly wipe up material excesses with towels.
- ◆ Promptly clean all form surfaces following stripping. Then reapply BIO-NOX.
- ◆ Clean application equipment with soap and water immediately following use.

TECHNICAL DATA

Color	Milky White
Clarity	Opaque
Bulk Density	8.1 lbs. / gal. (97 g / L)
Freeze Point	32° F (0° C)
Flash Point	>200° F (93° C)
VOC	< 100 g / L
VOC Classification	Form Release Agents

PACKAGING

Product is packaged in 5 gal (19 L) pails, 20 liter pails, 55 gal (208 L) drums, 200 liter drums, 275 gal (1,040 L) totes and 1,000 liter totes.

SHELF LIFE

Shelf life is 1 year. Use before the "USE BY" date stated on product packaging.

HANDLING/STORAGE

Store in a dry location within a temperature range between 40° F (4° C) and 100° F (38° C).

AVAILABILITY & TECHNICAL SERVICES

In addition to corporate offices in Omaha, Nebraska, Nox-Crete, Inc. maintains regional offices and distribution centers in principal markets throughout the world. For source or technical information, call 800-669-2738 or 402-341-2080.

LIMITED WARRANTY

NOTICE-READ CAREFULLY

CONDITIONS OF SALE

NOX-CRETE offers this product for sale subject to, and Buyer and all users are deemed to have accepted, the following conditions of sale and limited warranty which may only be varied by written agreement of a duly authorized corporate officer of NOX-CRETE. No other representative of or for NOX-CRETE is authorized to grant any warranty or to waive limitation of liability set forth below.

WARRANTY LIMITATION

NOX-CRETE warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, NOX-CRETE will replace the defective product with new product without charge to the purchaser.

NOX-CRETE makes NO OTHER WARRANTY, either express or implied, concerning this product. There is NO WARRANTY OF MERCHANTABILITY. In no case shall NOX-CRETE be liable for special, indirect or consequential damages resulting from the use or handling of the product and no claim of any kind shall be greater in amount than the purchase price of the product in respect of which damages are claimed.

INHERENT RISKS

NOX-CRETE MAKES NO WARRANTY WITH RESPECT TO THE PERFORMANCE OF THE PRODUCT AFTER IT IS APPLIED BY THE PURCHASER, AND PURCHASER ASSUMES ALL RISKS ASSOCIATED WITH THE USE OR APPLICATION OF THE PRODUCT.

nox-crete®

chemical solutions to concrete problems

www.nox-crete.com

Updated 08/01/25. This version replaces all previous versions.

1444 S. 20th St. • P.O. Box 8102 • Omaha, Nebraska 68108 United States
PHONE: (800) NOX-CRETE (669-2738) or (402) 341-2080