


# PRODUCT DATA

## PRECAST RELEASE EL

Standard performance general purpose chemically and physically active concrete form release agent.

VOLATILE ORGANIC COMPOUND (VOC)  
REGULATORY COMPLIANCE

PRECAST RELEASE EL

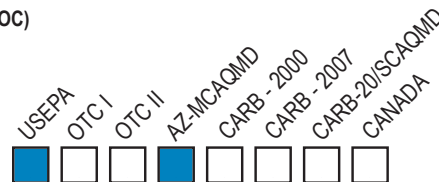

### HOW IT WORKS

PRECAST RELEASE EL (PR EL) contains a physical barrier component and chemically active compounds that react with lime (calcium hydroxide) present in fresh concrete to yield a slippery soap film on the form surface that prevents concrete sticking and improves form stripping.

### APPLICATIONS

- ◆ Can be used on most form surfaces except foam or latex.

### ADVANTAGES

- ◆ Provides a crisp, positive release.
- ◆ Reduces form cleaning and maintenance costs. Forms become self-cleaning with continued use.
- ◆ Resists removal by foot traffic and rain.
- ◆ Can be used on forms that have been previously treated with competitive form oils.
- ◆ Ready to use.
- ◆ Low odor.
- ◆ Can be stored at below-freezing temperatures.
- ◆ Sprayable down to 0° F (-18° C) (liquid temperature).
- ◆ Protects metal and wood forms from weather damage prior to pour.
- ◆ Will not stain concrete surfaces and concrete can be painted with adequate surface preparation.
- ◆ Use to coat concrete mixing and placing equipment to prevent concrete buildup.
- ◆ Non-staining form oil.
- ◆ For extremely cold temperatures, use RELEASE AGENT #10 450 or PRECAST RELEASE #80 450.

### ⚠ PRECAUTIONS ⚠

- ◆ Not generally recommended for use in architectural concrete applications.

### USE INSTRUCTIONS

- ◆ Request current product literature, labels, and safety data sheets from manufacturer and read thoroughly before product use.

- ◆ Site environmental conditions, substrate conditions, and construction have a major effect on product selection, application methods, procedures and rates, appearance, and performance. Product literature provides general information applicable to some conditions. However, an adequate site test application by the purchaser or installer in advance of field scale use is mandatory (irrespective of any other verbal or written representations) to verify that product and quantities purchased can be satisfactorily applied and will achieve desired appearance and performance under intended use conditions.
- ◆ Application rates necessary to optimize performance vary with the form surface condition, porosity, concrete buildup (if any), concrete composition, concrete curing time, and temperatures.
- ◆ Ready to use. Requires no dilution.
- ◆ Can be applied by all conventional methods, but spray application is highly recommended.
- ◆ Apply to clean, reasonably dry forms using care to prevent contact with reinforcing steel.
- ◆ Avoid puddles, runs, and excessive spray drift.
- ◆ Typical application rate range on an absorptive surface is 600 - 800 sf / gal. (15 - 20 sm / L). Typical application rate on non-absorptive surfaces is 1,500 sf / gal. (37 sm / L).

### TECHNICAL DATA

|                    |                              |
|--------------------|------------------------------|
| Color, ASTM D2300  | 0.5 - 1.0                    |
| Clarity            | Clear                        |
| Odor               | Mild                         |
| Flash Point        | >200° F (94° C)              |
| Bulk Density       | 7.2 lbs. / gal. (.86 kg / L) |
| VOC                | <370 g / L                   |
| VOC Classification | Form Release Agents          |

### PACKAGING

Product is packaged in 5 gal (19 L) pails, 20 liter pails, 55 gal (208 L) drums, 200 liter drums, 275 gal (1,040 L) totes and 1,000 liter totes.

### SHELF LIFE

Shelf life is 2 years. Use before the "USE BY" date stated on product packaging.

Form Release Agents

nox-crete®

chemical solutions to concrete problems

## HANDLING/STORAGE

---

Store in a dry location within a temperature range between 40° F (4° C) and 100° F (38° C). To minimize darkening, store all polyethylene plastic totes inside and away from direct sunlight and all other sources of ultraviolet radiation.

## AVAILABILITY & TECHNICAL SERVICES

---

In addition to corporate offices in Omaha, Nebraska, Nox-Crete Inc. maintains regional offices and distribution centers in principal markets throughout the world. For source or technical information, call 800-669-2738 or 402-341-2080.

## LIMITED WARRANTY

---

### NOTICE-READ CAREFULLY

#### CONDITIONS OF SALE

NOX-CRETE offers this product for sale subject to, and Buyer and all users are deemed to have accepted, the following conditions of sale and limited warranty which may only be varied by written agreement of a duly authorized corporate officer of NOX-CRETE. No other representative of or for NOX-CRETE is authorized to grant any warranty or to waive limitation of liability set forth below.

#### WARRANTY LIMITATION

NOX-CRETE warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, NOX-CRETE will replace the defective product with new product without charge to the purchaser.

NOX-CRETE makes NO OTHER WARRANTY, either express or implied, concerning this product. There is NO WARRANTY OF MERCHANTABILITY. In no case shall NOX-CRETE be liable for special, indirect or consequential damages resulting from the use or handling of the product and no claim of any kind shall be greater in amount than the purchase price of the product in respect of which damages are claimed.

#### INHERENT RISKS

NOX-CRETE MAKES NO WARRANTY WITH RESPECT TO THE PERFORMANCE OF THE PRODUCT AFTER IT IS APPLIED BY THE PURCHASER, AND PURCHASER ASSUMES ALL RISKS ASSOCIATED WITH THE USE OR APPLICATION OF THE PRODUCT.



chemical solutions to [concrete](#) problems

[www.nox-crete.com](http://www.nox-crete.com)

Updated 03/08/25. This version replaces all previous versions.

1444 S. 20th St. • P.O. Box 8102 • Omaha, Nebraska 68108 United States  
PHONE: (800) NOX-CRETE (669-2738) or (402) 341-2080